


Model BI-10

Max. Wheel RPM 3800
Shaft Diameter, In. 3/4"
Max. HP 2


Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.
Performance certified is for installation Type B: Free inlet, Ducted outlet.
Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

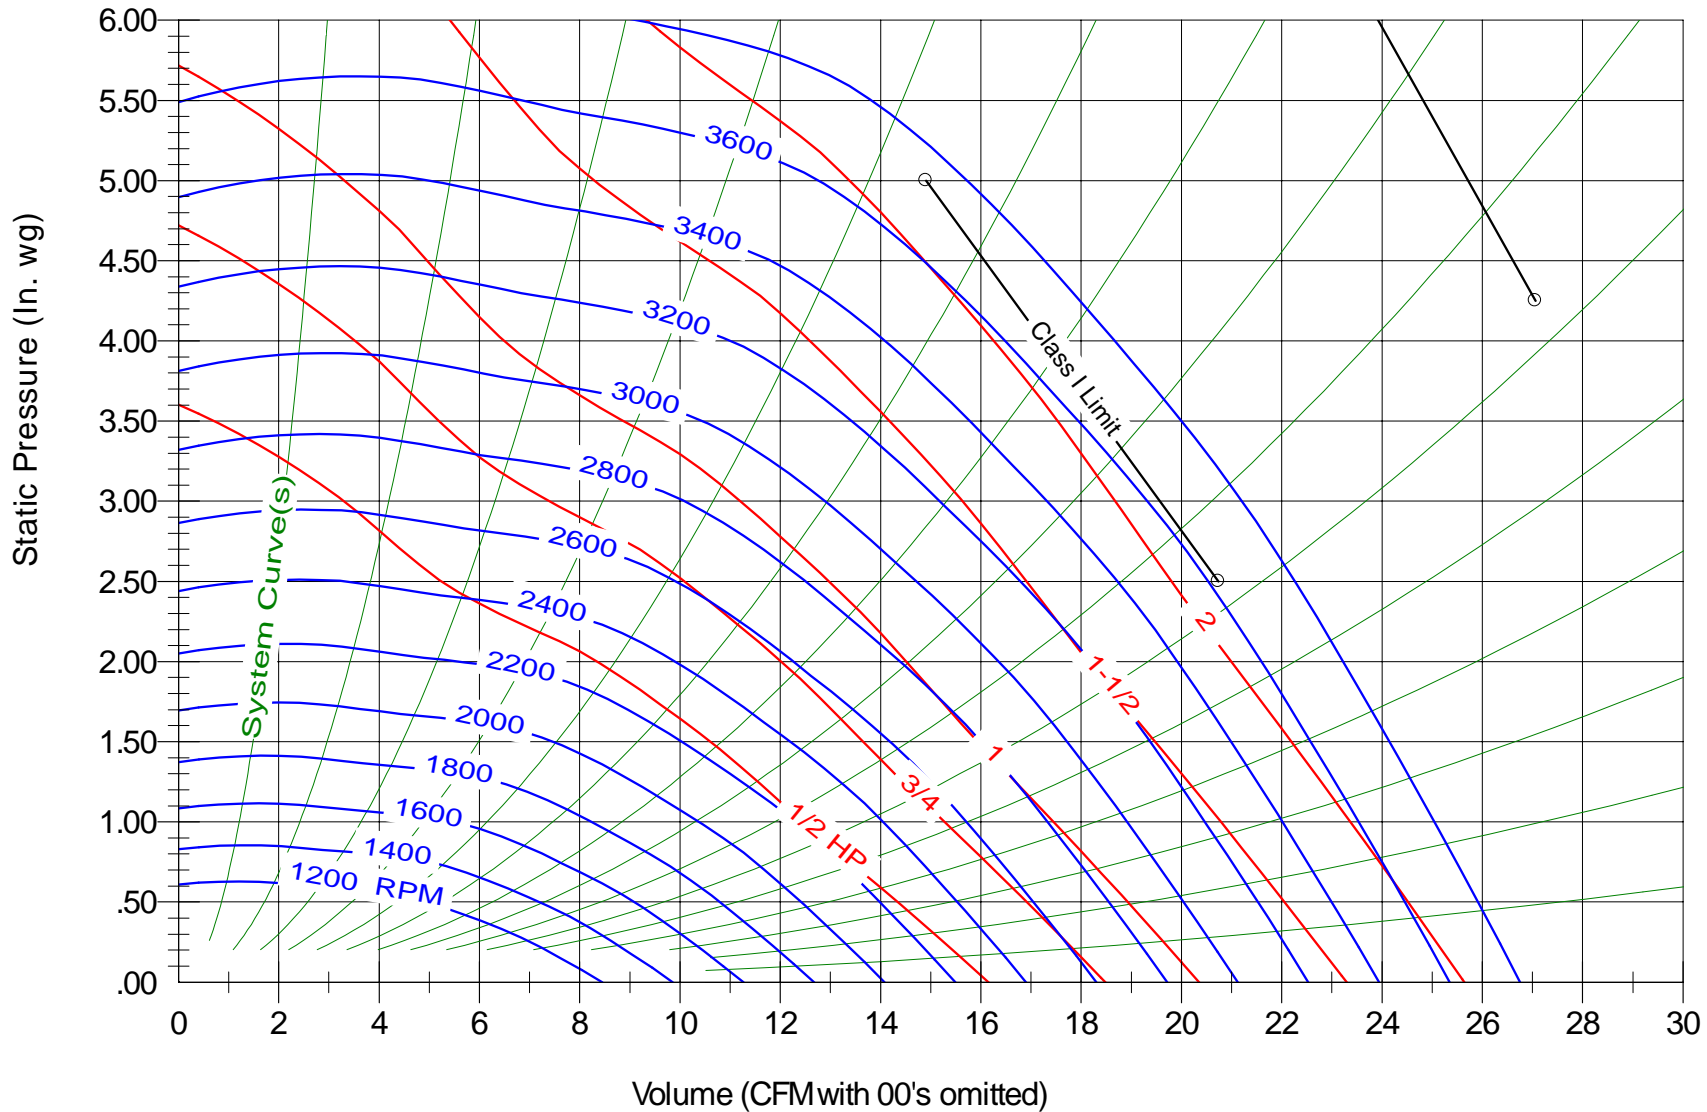

Model BI-12

Max. Wheel RPM 3800
Shaft Diameter, In. 1"
Max. HP 5

Delhi Industries Inc. certifies that the Model shown herein is licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified ratings Programme. Installation Type B - Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

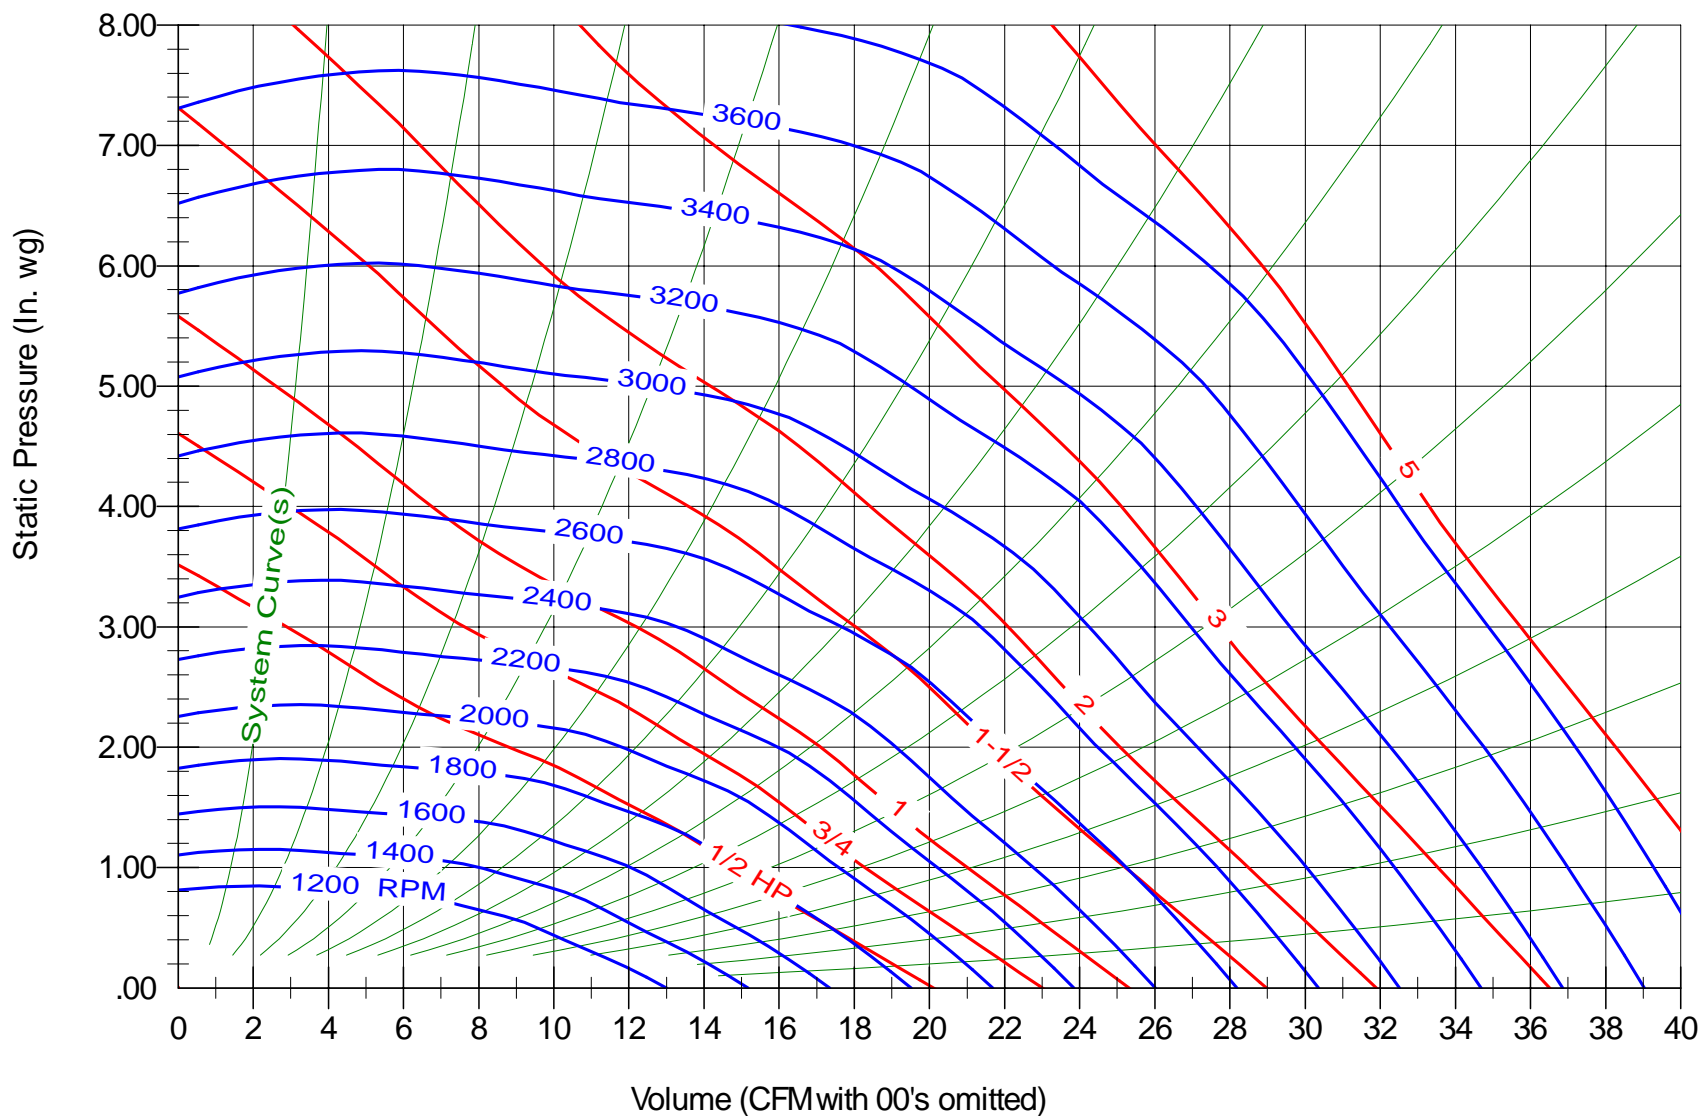

Model BI-13


Max. Wheel RPM 3600

Shaft Diameter, In. 1"

Max. HP 7-1/2

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

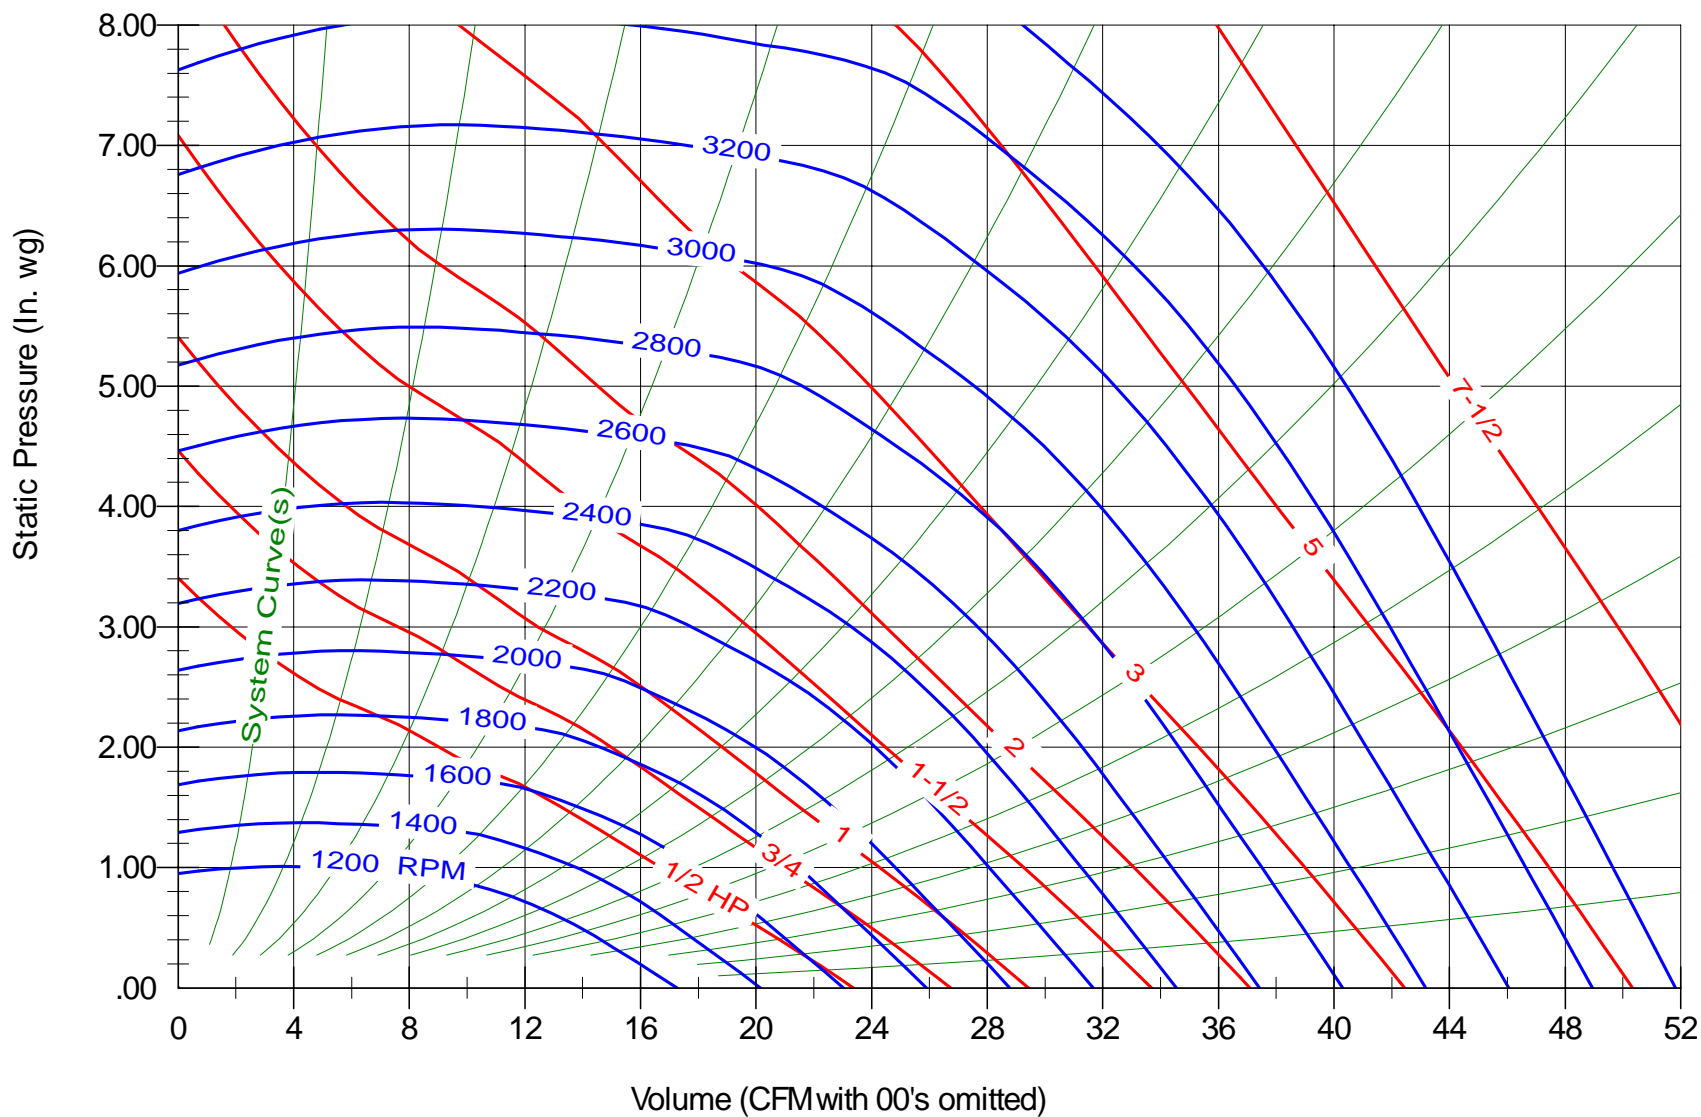

Model BI-15


Max. Wheel RPM 3200

Shaft Diameter, In. 1"

Max. HP 7-1/2

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

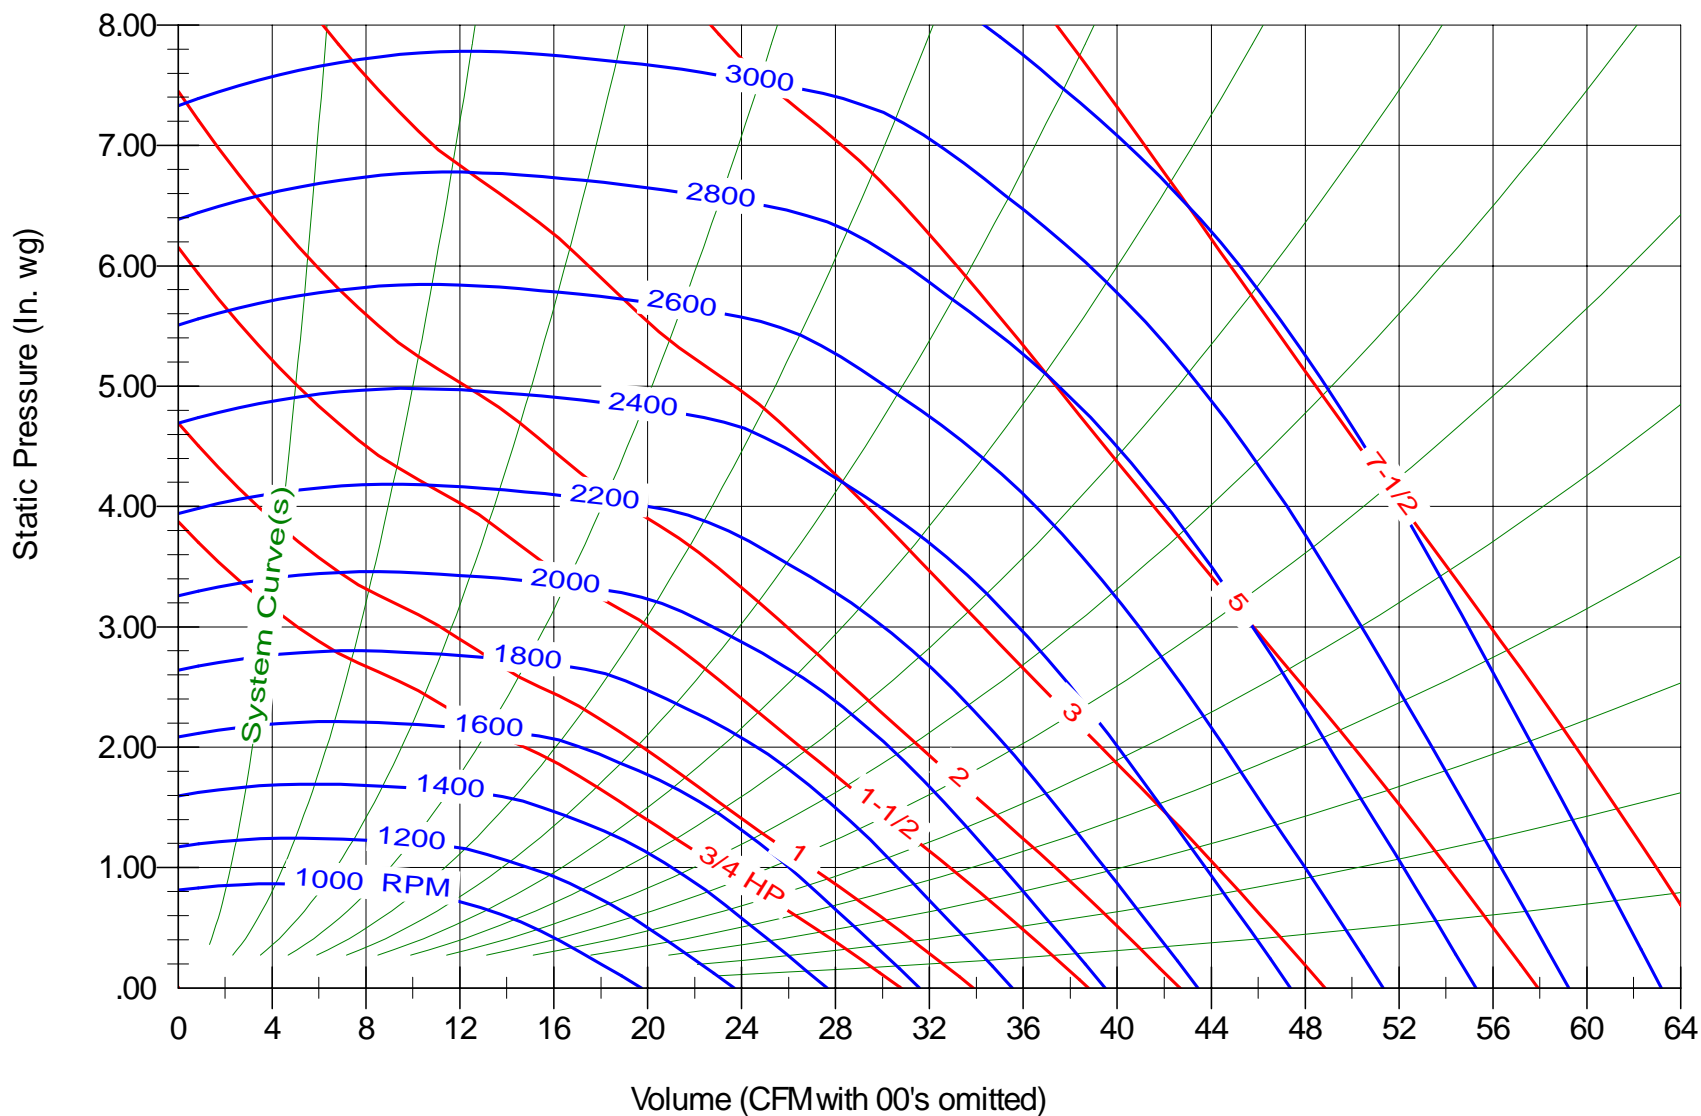


Model BI-16

Max. Wheel RPM 3000

Shaft Diameter, In. 1-3/16"

Max. HP 10

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.
Performance certified is for installation Type B: Free inlet, Ducted outlet.
Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

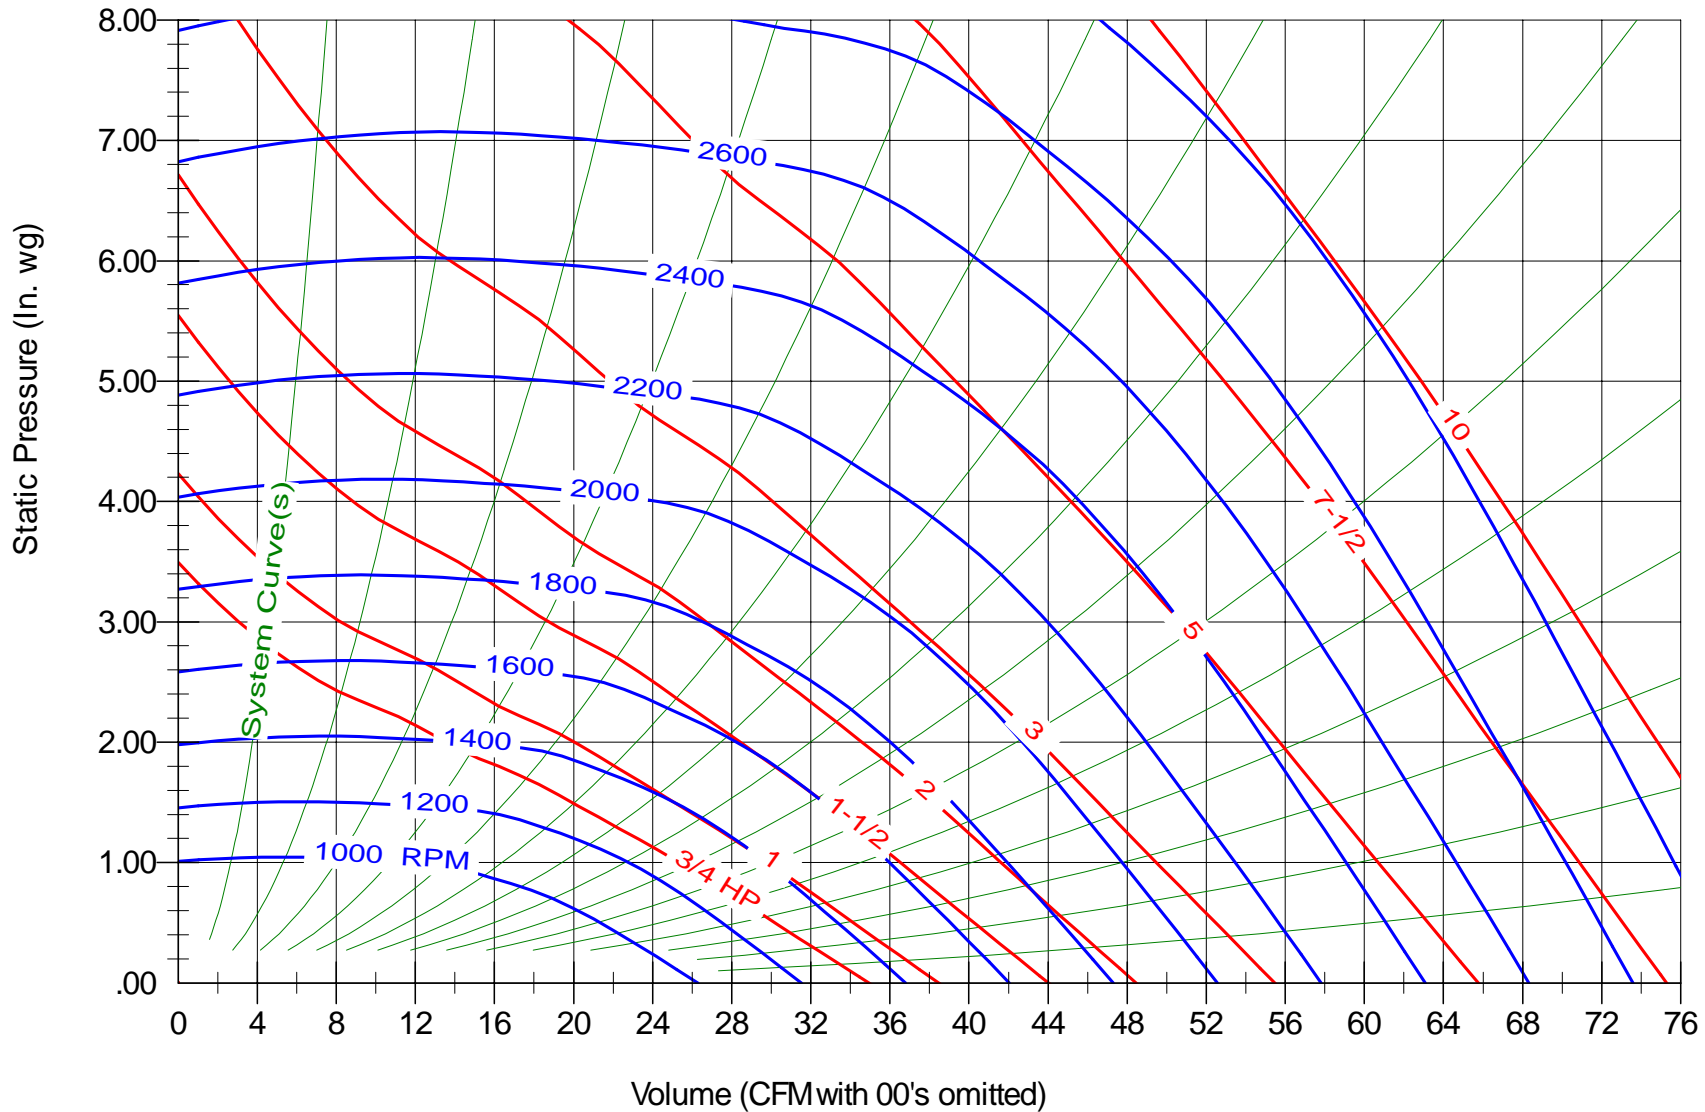

Model BI-18


Max. Wheel RPM 2500

Shaft Diameter, In. 1-3/16"

Max. HP 10

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

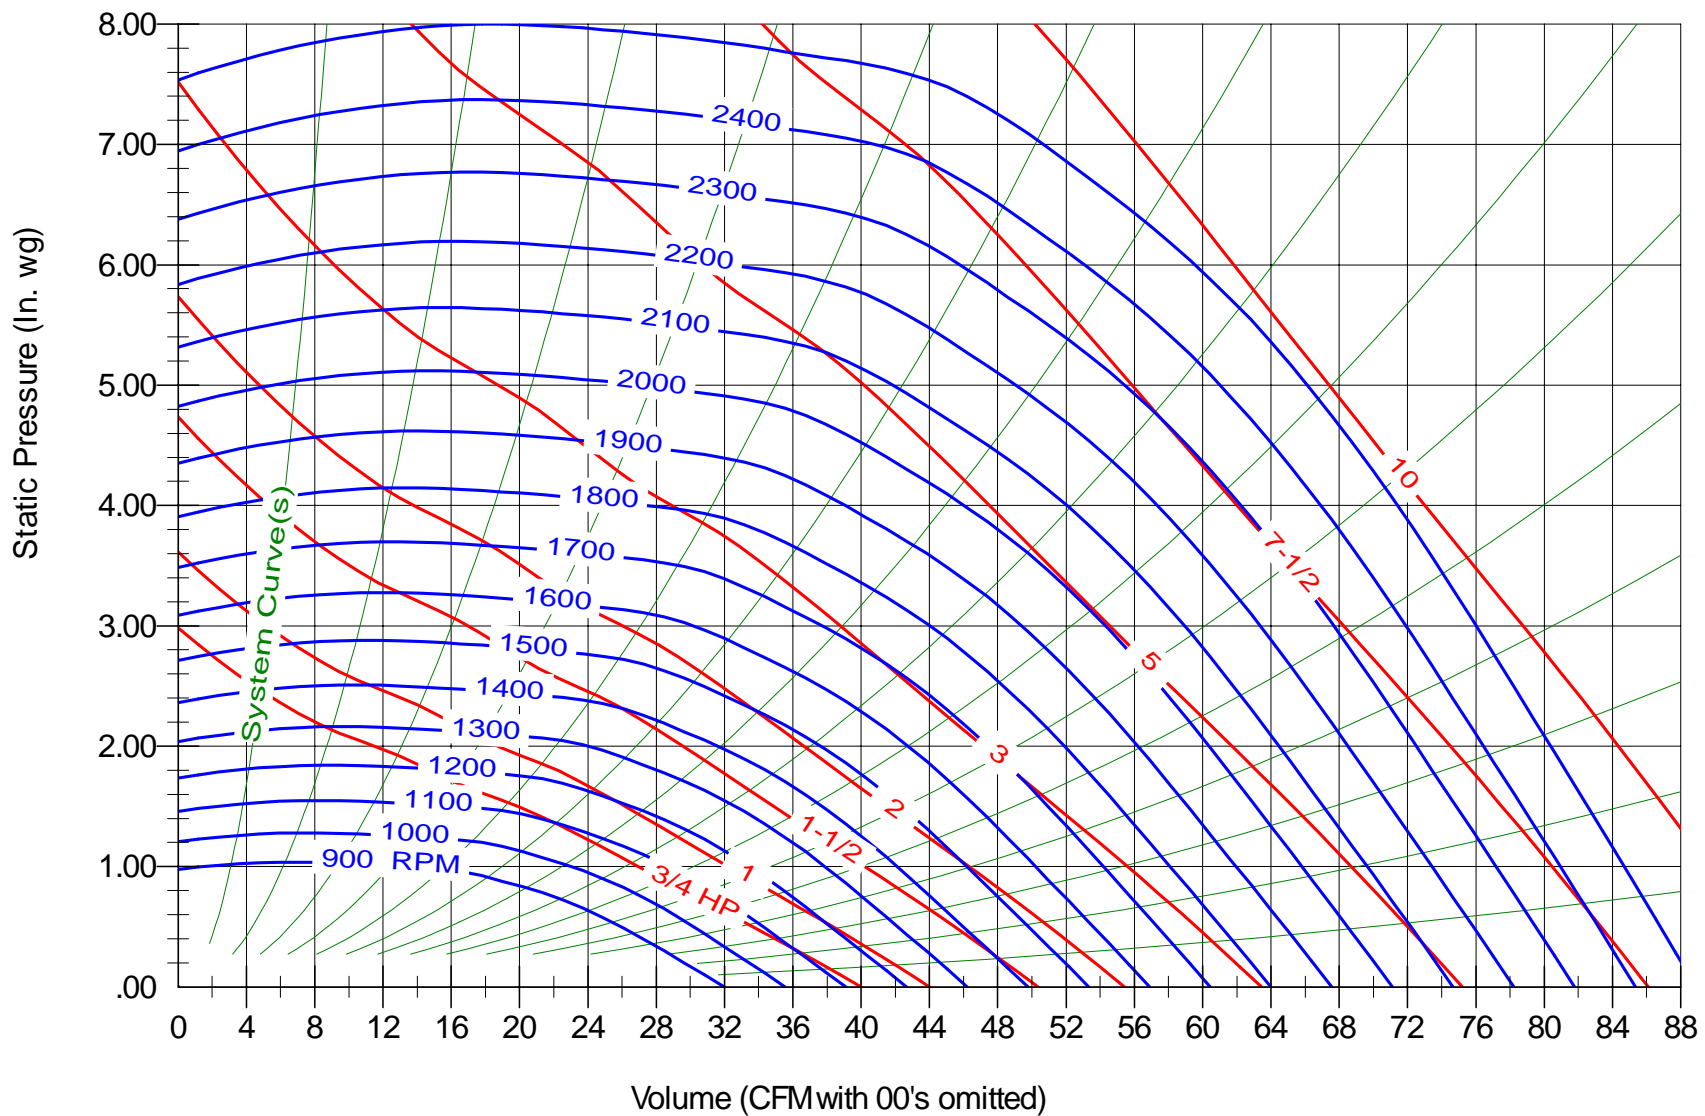

Model BI-20


Max. Wheel RPM 2200

Shaft Diameter, In. 1-3/16"

Max. HP 10

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

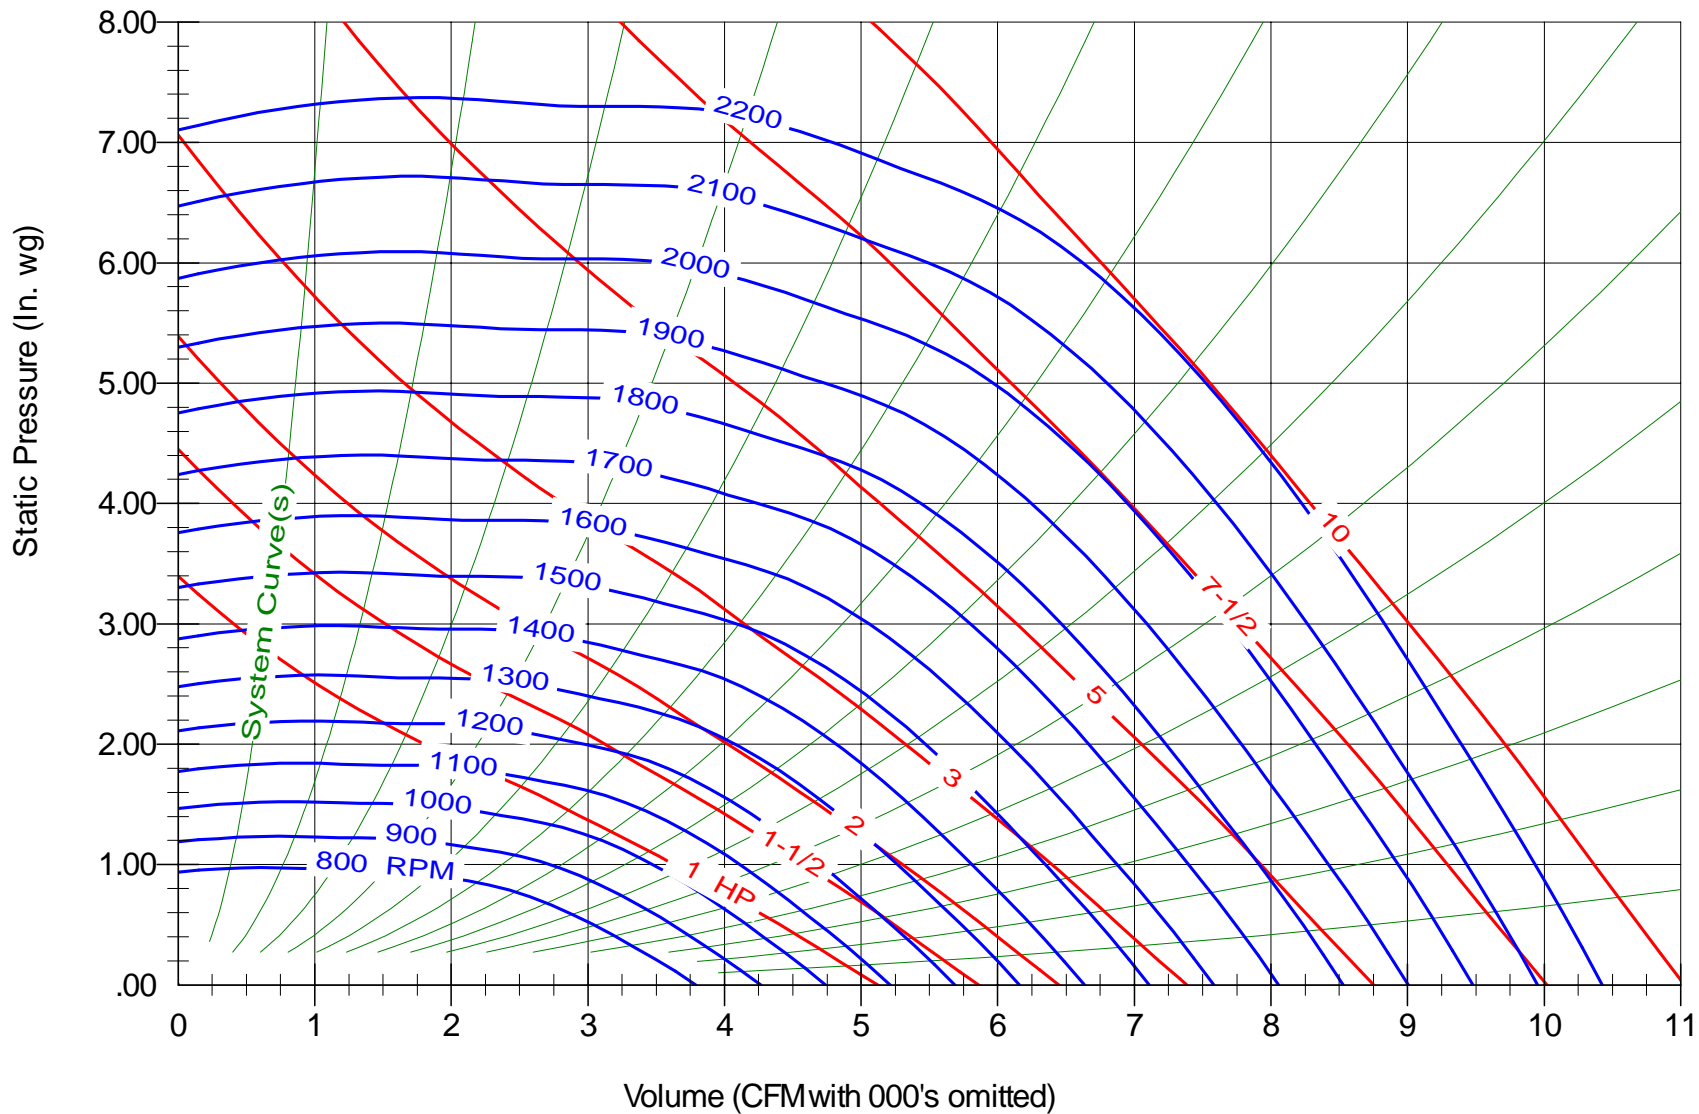

Model BI-22


Max. Wheel RPM 2050

Shaft Diameter, In. 1-3/16"

Max. HP 15

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

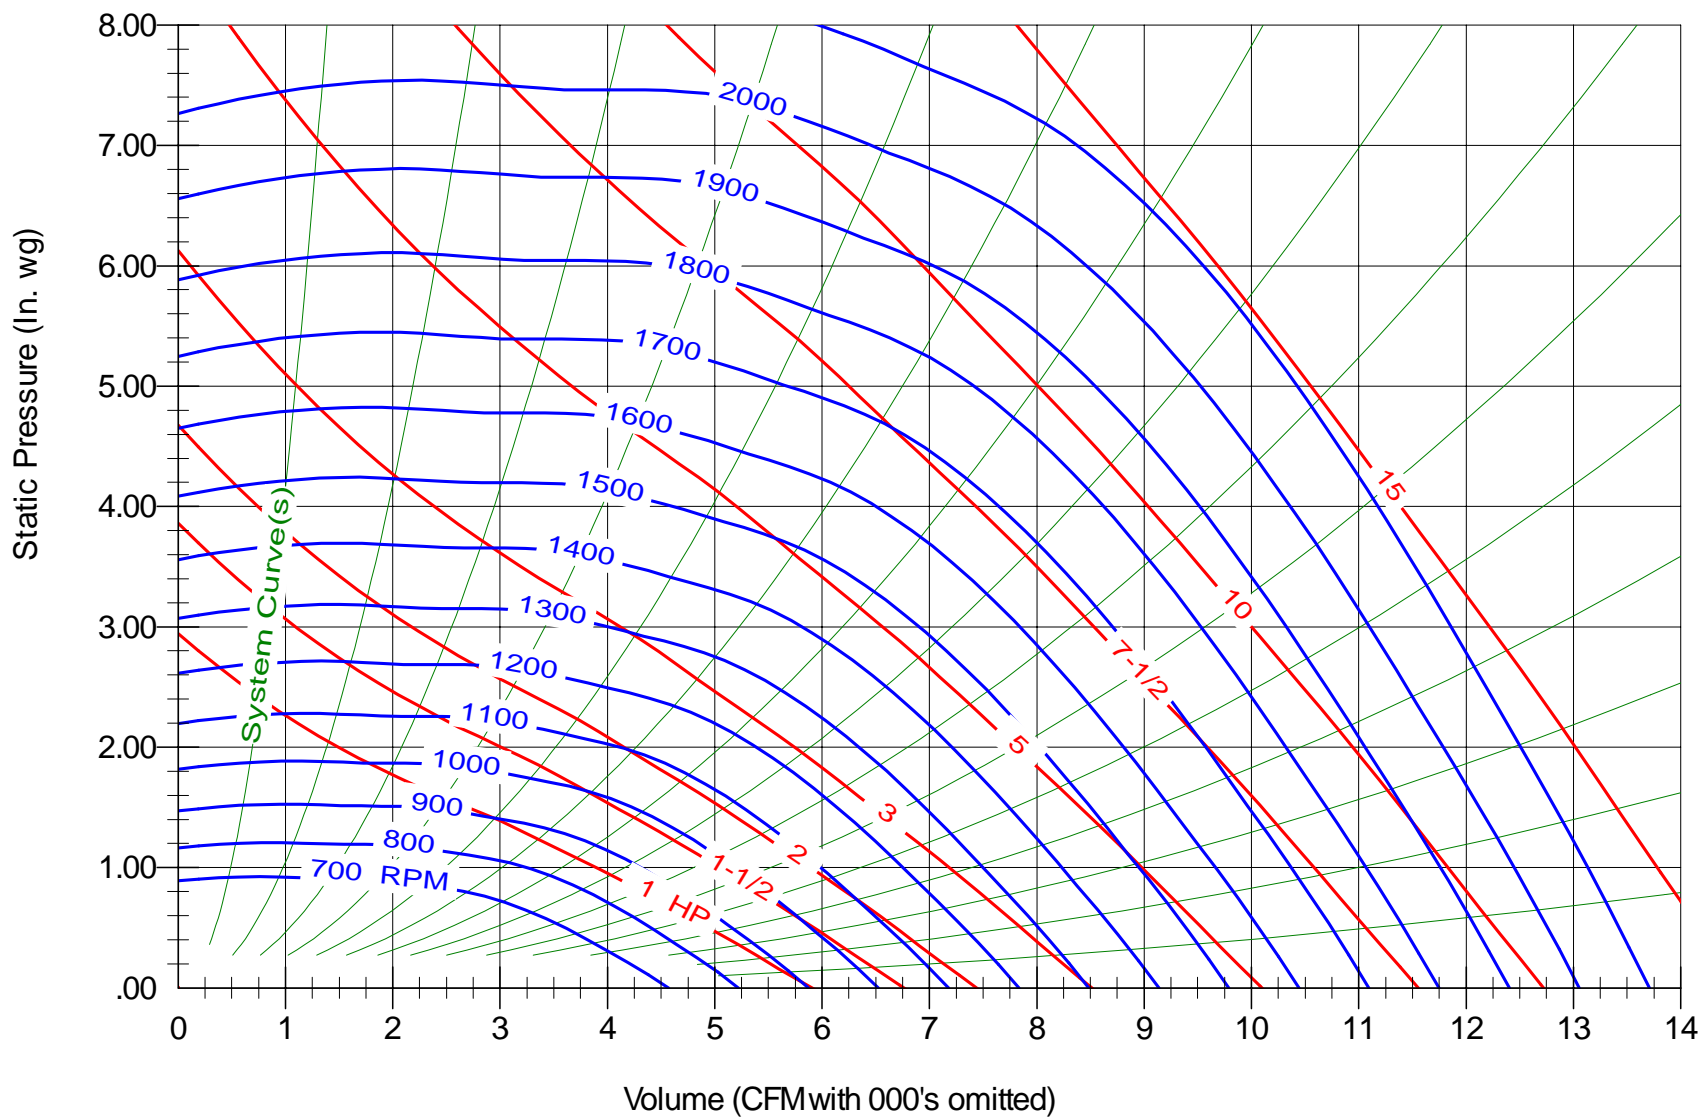


Model BI-24

Max. Wheel RPM 1600

Shaft Diameter, In. 1-7/16"

Max. HP 15

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.
Performance certified is for installation Type B: Free inlet, Ducted outlet.
Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

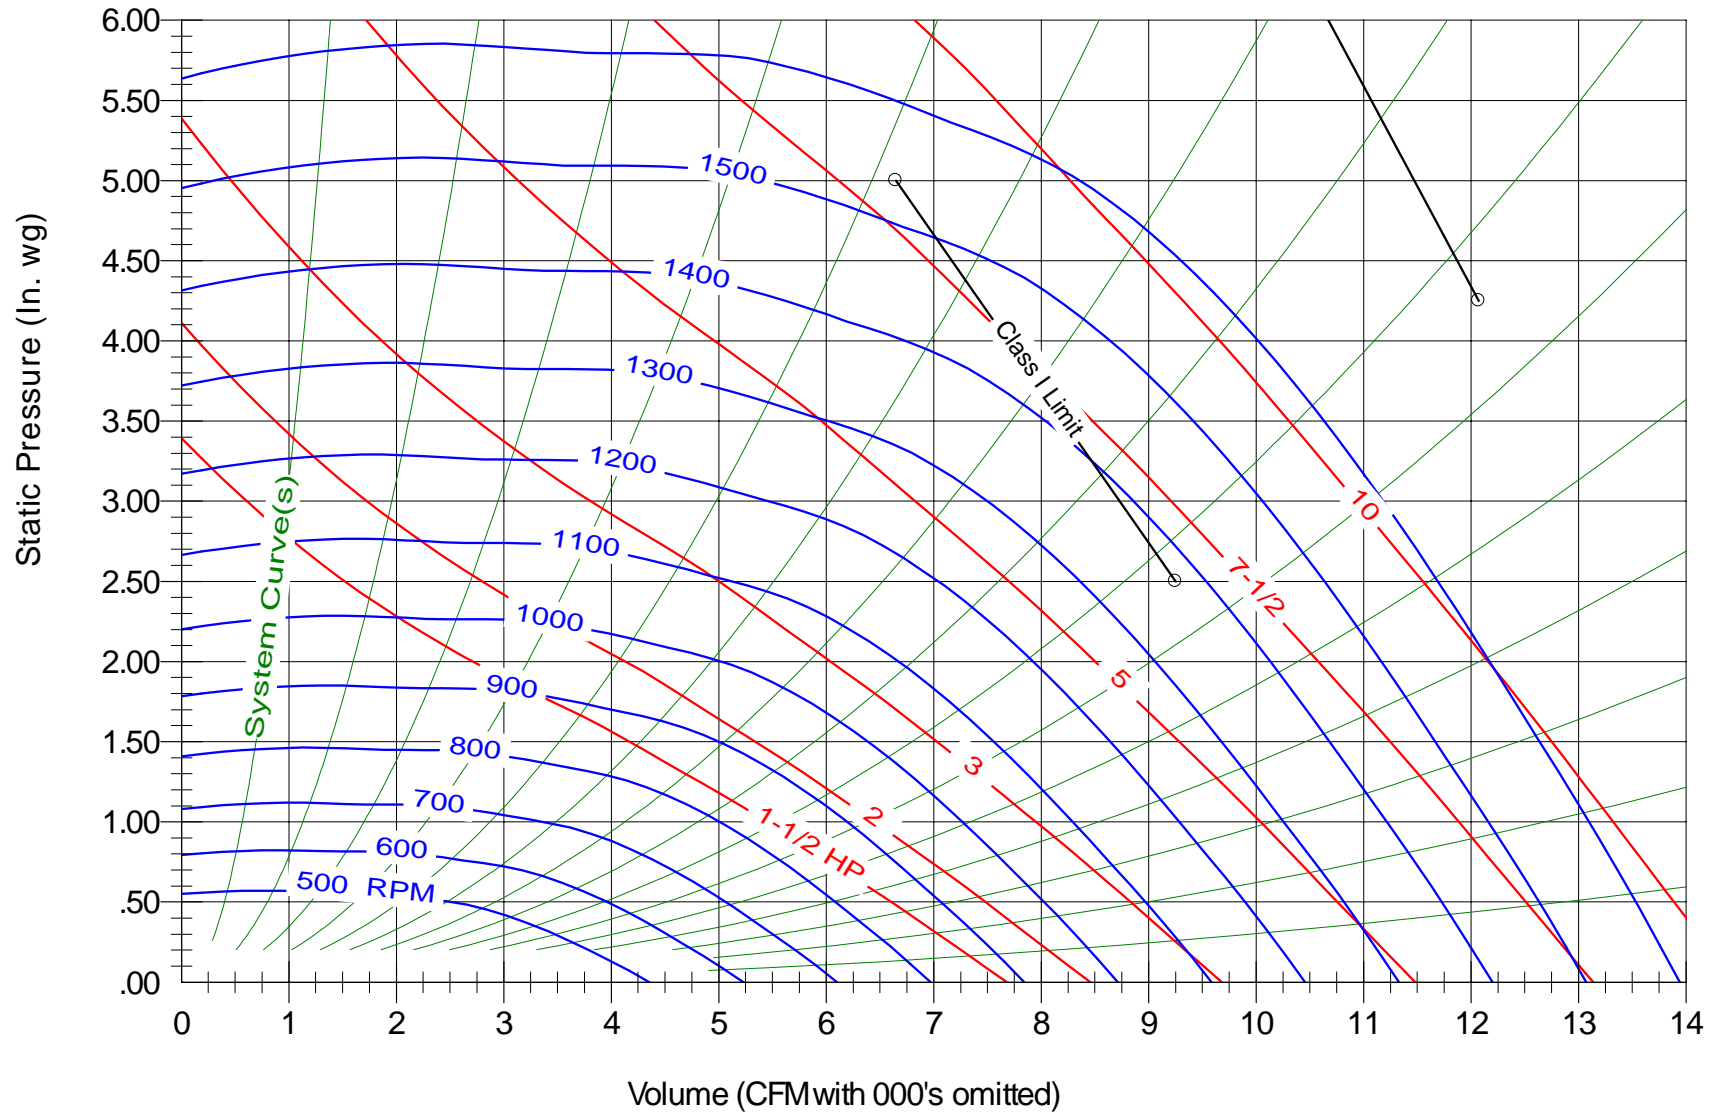

Model BI-27


Max. Wheel RPM 1450

Shaft Diameter, In. 1-7/16"

Max. HP 15

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

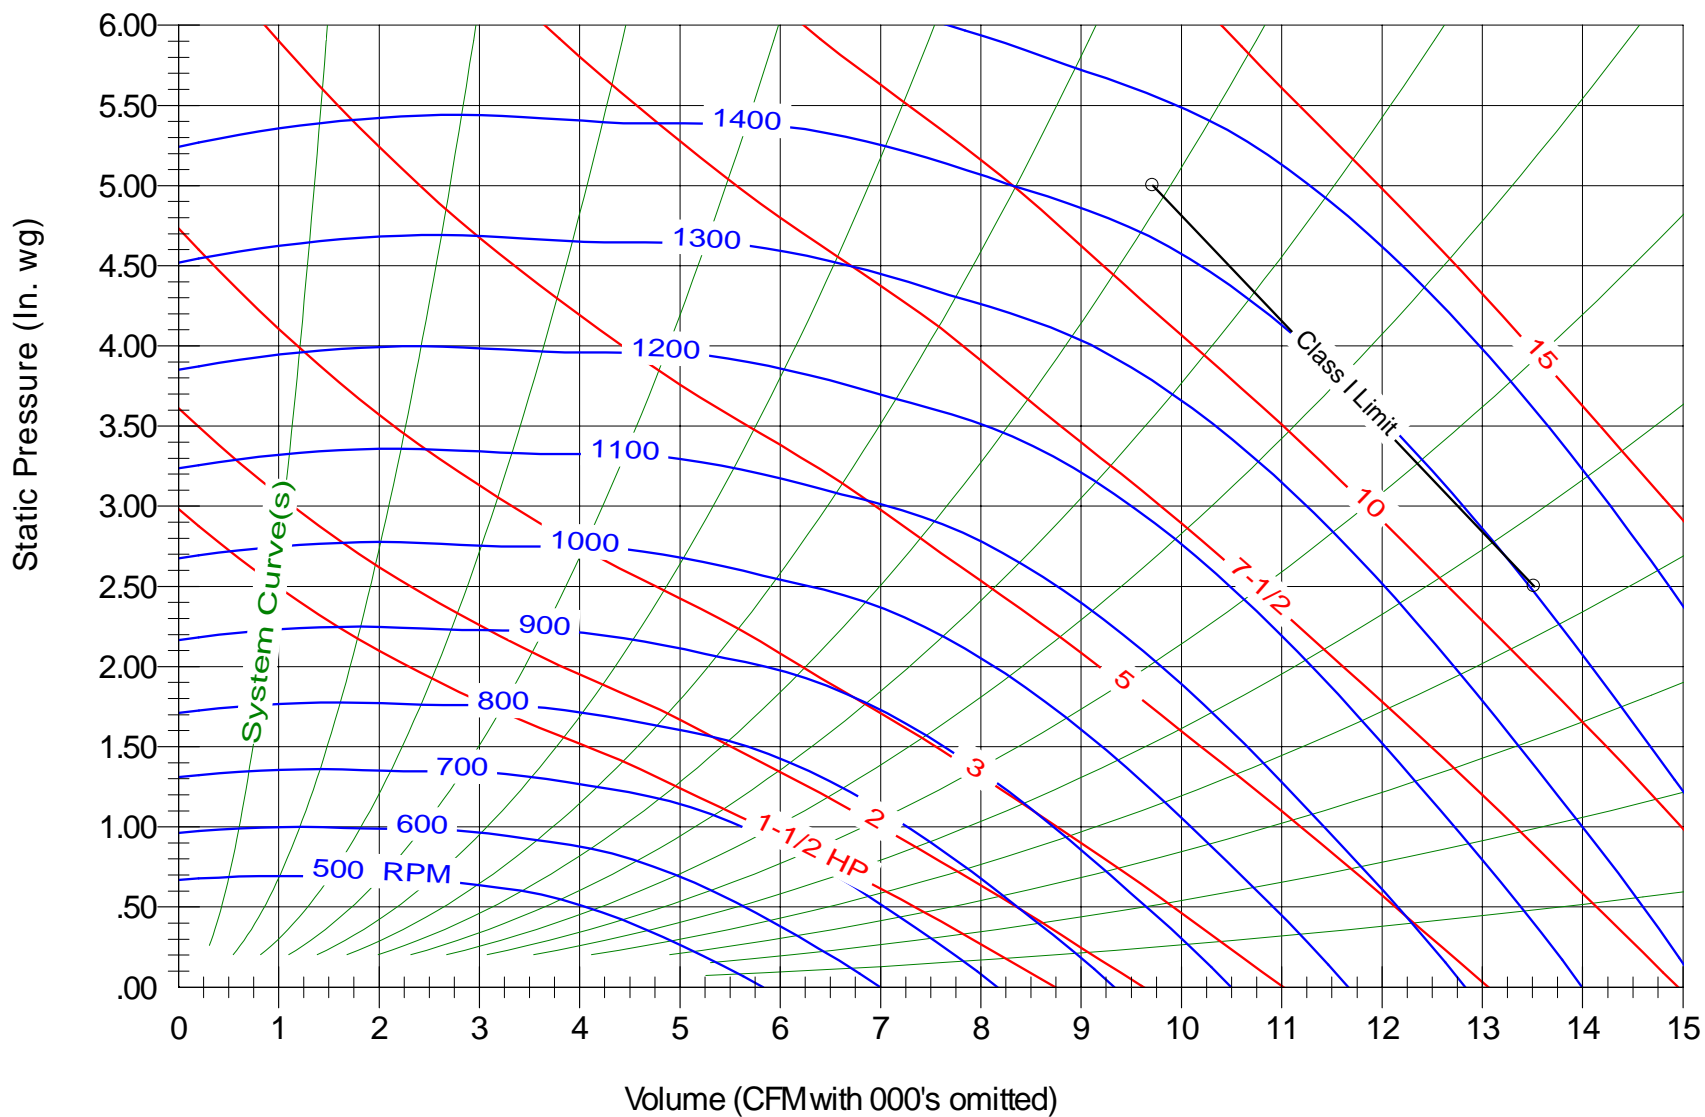

Model BI-30


Max. Wheel RPM 1300

Shaft Diameter, In. 1-11/16"

Max. HP 15

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.

Performance certified is for installation Type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

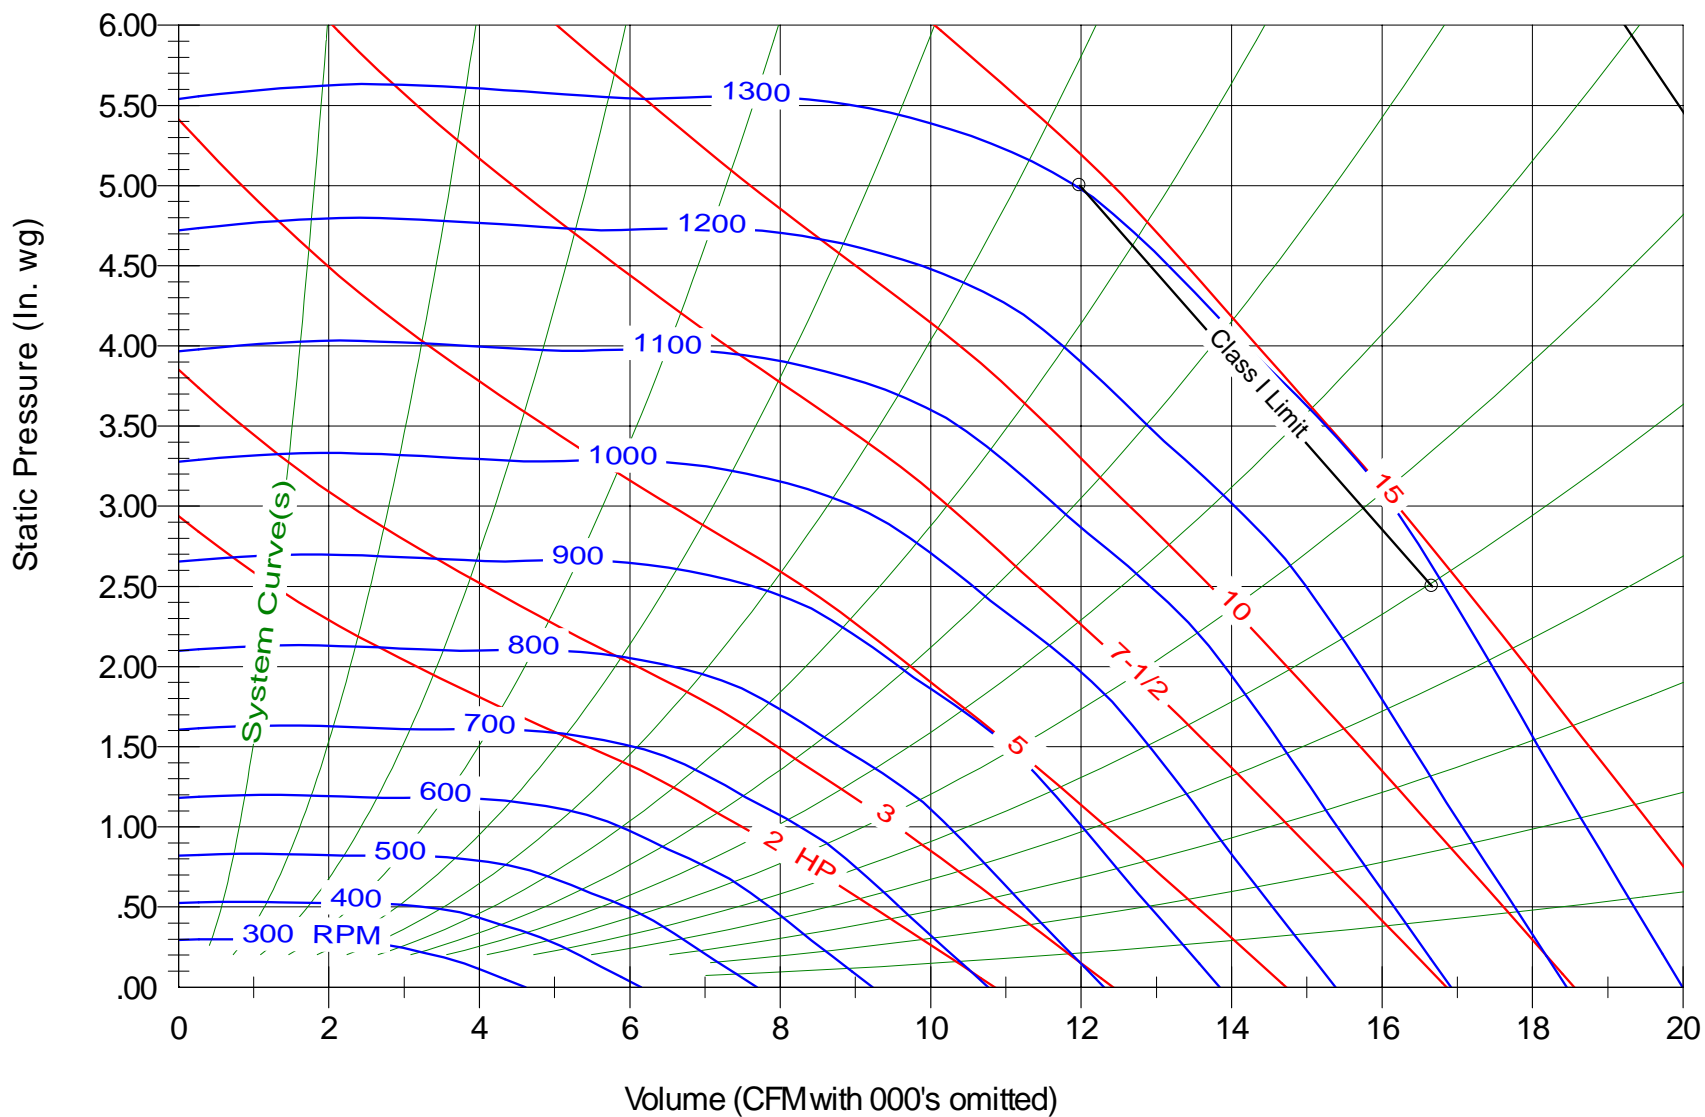


Model BI-33

Max. Wheel RPM 1180

Shaft Diameter, In. 1-11/16"

Max. HP 20

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.
Performance certified is for installation Type B: Free inlet, Ducted outlet.
Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

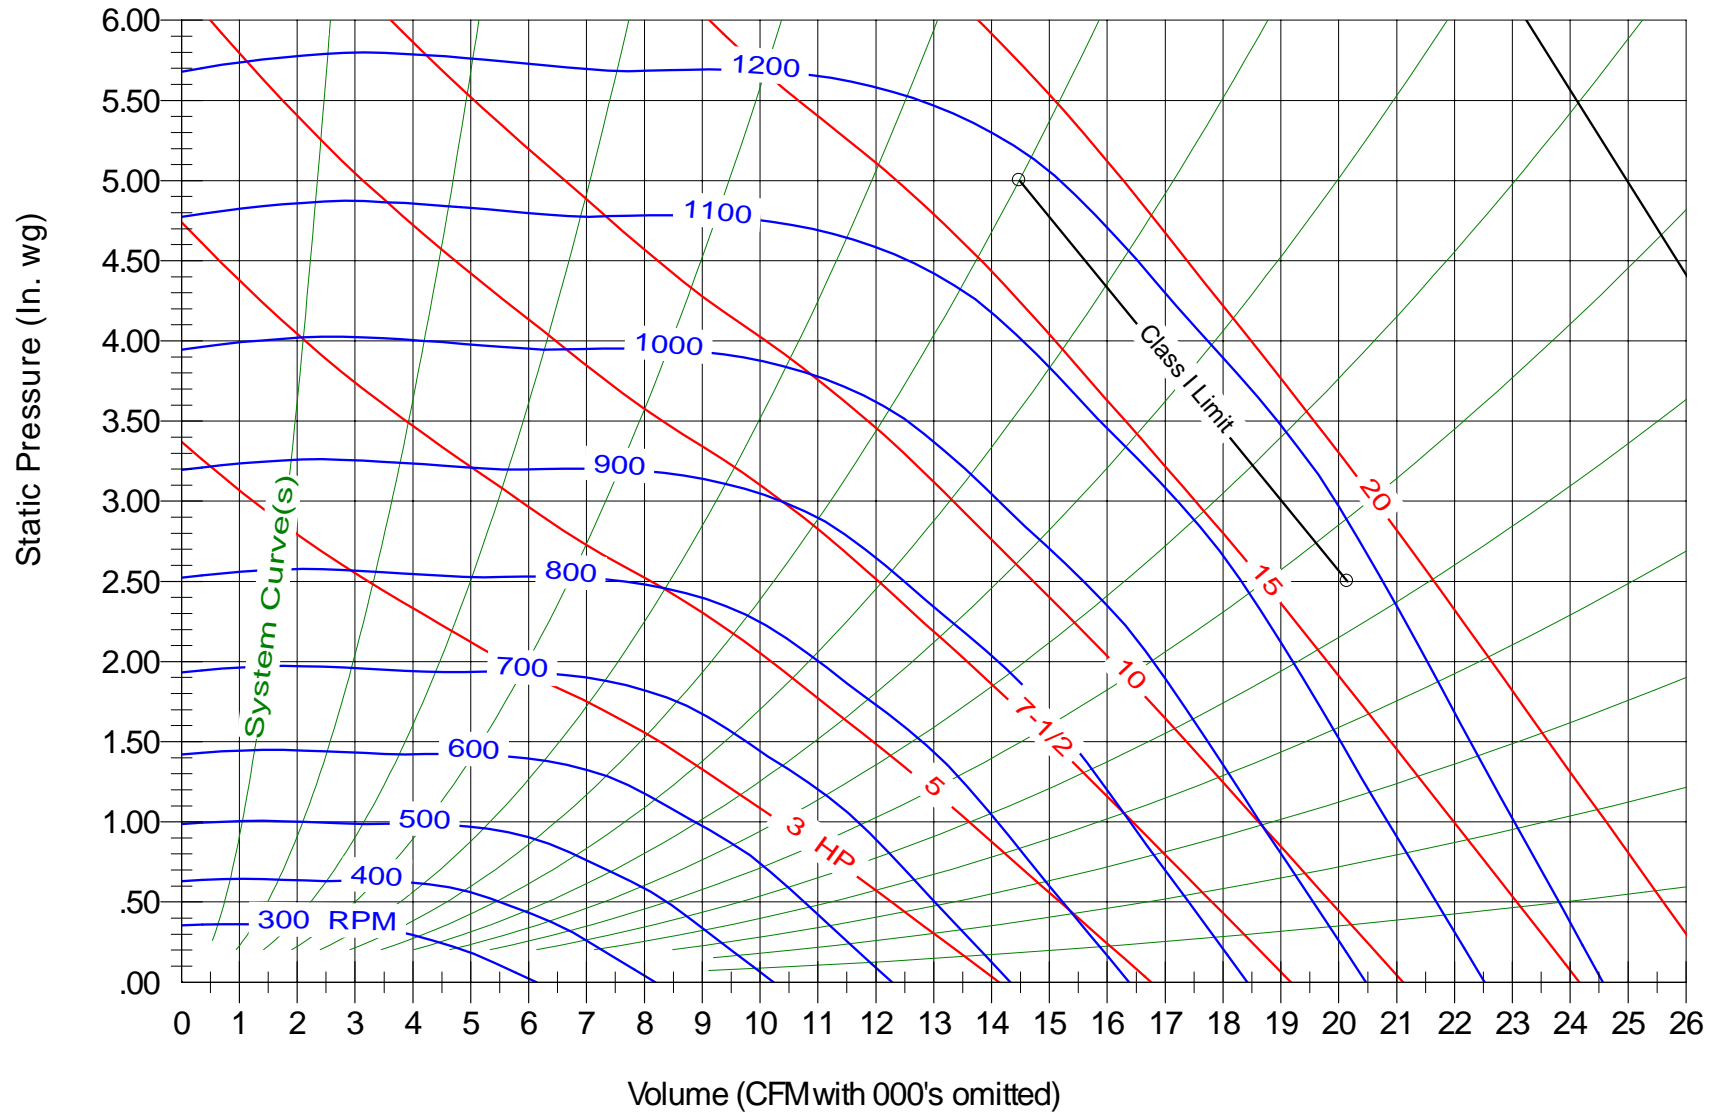

Model BI-36

Max. Wheel RPM 1070

Shaft Diameter, In. 1-15/16"

Max. HP 25

Delhi Industries Inc. certifies that the BI/BI-RM Series Utility Blowers shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211, and comply with the requirements of the AMCA Certified Ratings Programme.
Performance certified is for installation Type B: Free inlet, Ducted outlet.
Power rating bhp does not include transmission losses. Performance ratings do not include the effects of appurtenances (accessories).

