



ROOF EXHAUSTERS

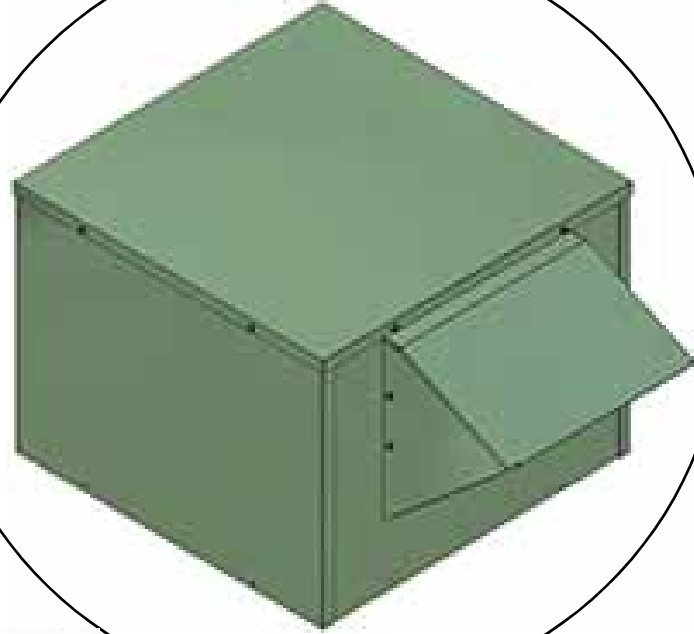


<u>CONTENTS</u>	<u>PAGE</u>
Description	2
Dimensions	3
Performance	4-6
Submittal Drawing	7

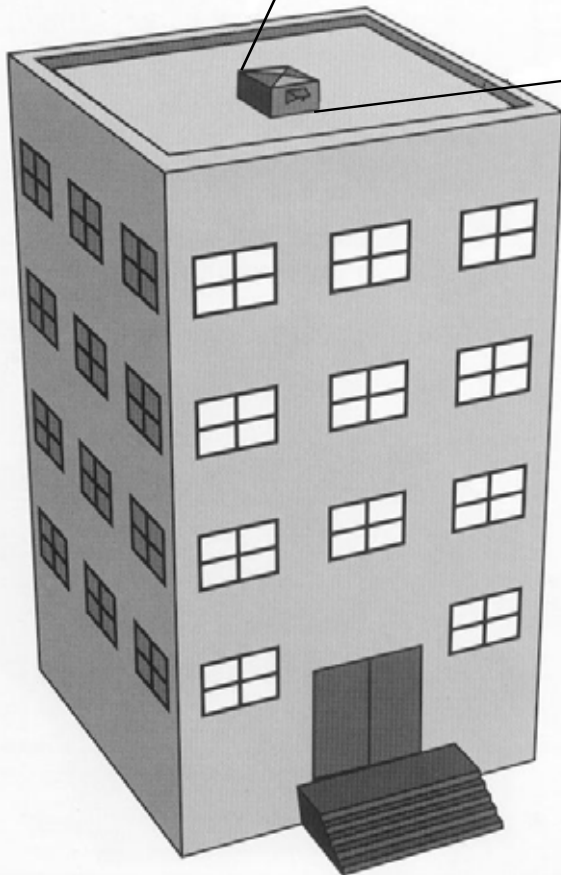

Delhi Industries Inc. certifies that the 300 Series Roof Exhausters shown herein are licenced to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme.

300 SERIES ROOF EXHAUSTER

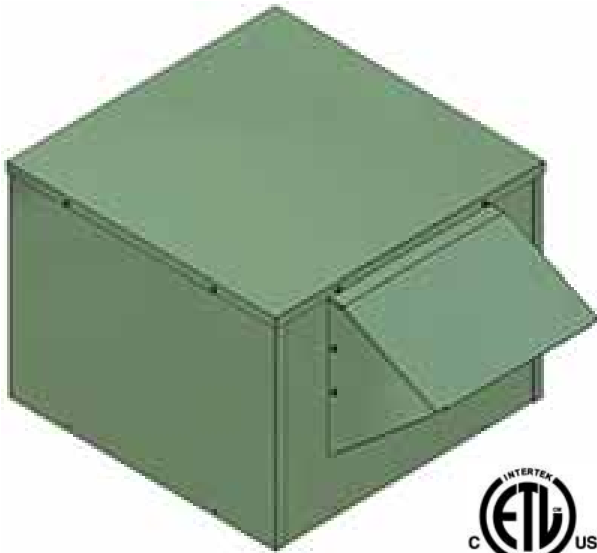

705

FEATURES


- An economical and efficient general purpose roof exhauster for use in schools, hospitals, high rise apartments, commercial and industrial applications.
- Low operating RPM of forward curved blowers results in **low noise levels**.
- **Quiet** operation. Blower is mounted on heavy steel angle with rubber isolators.
- Rugged **vandal resistant** galvanized steel cabinet.
- Attractive green baked enamel paint finish.
- Automatic gravity back draft damper and bird screen are included.
- Cabinet insulated with 1/2" fiberglass.
- Blower equipped with ball bearings suitable for operation in ambient temperatures of -65 to +250 deg. F.




Delhi Industries Inc. certifies that the 300 Series Roof Exhausters shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme

FEATURES (cont'd)

- Easy servicing - blower, motor and drives are accessible through the convenient removable top.
- Motor receives the cooling benefits of being in the air stream for increased motor life.
- Square base allows discharge to be orientated in any of 4 directions.
- Recessed base ensures weather proof mounting to curb.

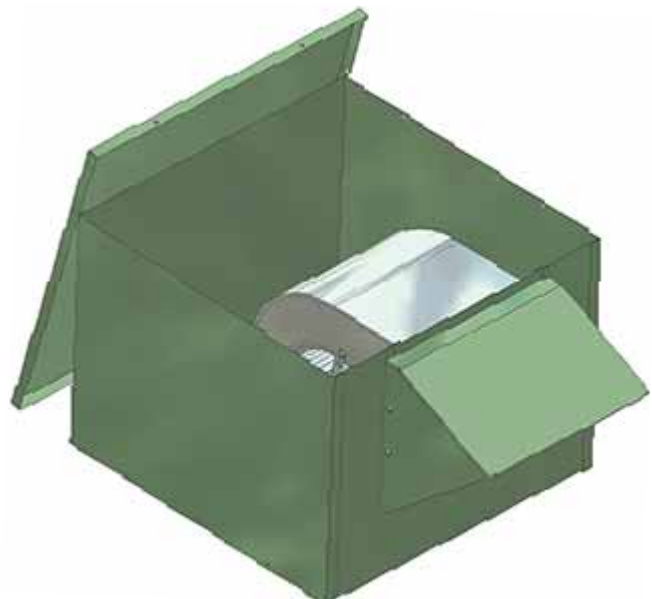

300 SERIES DIMENSIONS

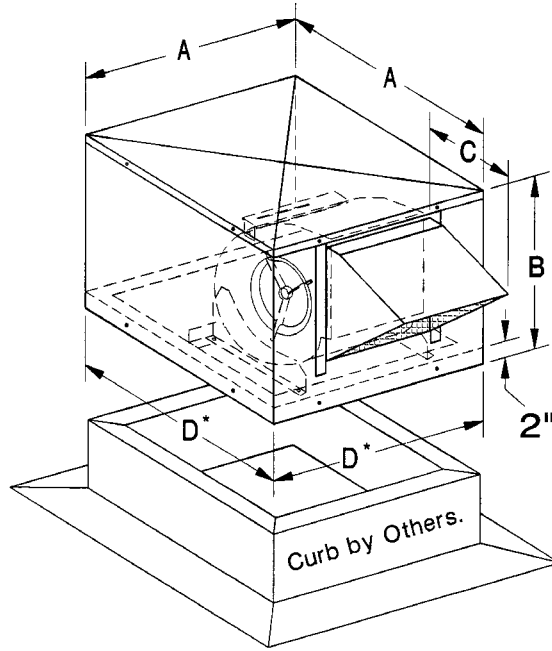

D* is an inside dimension. Curb size must be smaller to allow for flashing.

DIMENSIONS (inches)

MODEL	A	B	C	D	SHAFT DIA.	UNIT WT. (LBS.)
307	20-3/8	16-5/8	9	20	3/4"	45
309	24-3/8	19-3/8	10-5/8	24	3/4"	63
310	28-3/8	21-3/8	11-3/8	28	3/4"	88
312	32-3/8	24-5/8	13-1/8	32	3/4"	113
315	36-3/8	28-3/8	14-7/8	36	1"	156
318	40-3/8	33-3/4	17-3/8	40	1"	224

NOTE: WT. SHOWN IS LESS MOTOR AND DRIVE

300 Series Exhauster performance on pages 4 to 6 is shown for operation without the back draft damper

To estimate back draft damper resistance use the following formula:

$$\text{S.P.} = \frac{\text{CFM}^2 \times \text{DAMPER FACTOR}}{1,000,000}$$

Example Model 315, 1500 CFM:

$$\text{S.P.} = \frac{1500 \times 1500 \times .052}{1,000,000} = .117 \text{ in. w.g.}$$

MODEL	DAMPER FACTOR
307	1.520
309	.469
310	.175
312	.167
315	.052
318	.033

300 SERIES PERFORMANCE DATA

Model 307		3/4 HP MAXIMUM 3/4" SHAFT										TIP SPEED = 2.03 x RPM WHEEL DIA. = 7.75"															
CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP				
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP
300	569	572	0.02	--	769	0.04	1.6	1068	0.08	3.4	1299	0.13	5.0	1486	0.18	6.3	1796	0.30	8.4	2057	0.42	10.3	2287	0.56	12.4		
400	759	653	0.03	1.5	798	0.05	2.0	1081	0.10	3.6	1311	0.15	5.1	1509	0.21	6.7	1831	0.35	9.0	2093	0.49	11.1	2324	0.65	13.1		
500	949	762	0.06	3.0	861	0.07	2.8	1107	0.12	3.9	1327	0.18	5.4	1517	0.25	6.9	1850	0.40	9.3	2125	0.56	11.6	2358	0.73	13.9		
600	1139	872	0.09	4.0	960	0.11	4.1	1145	0.15	4.5	1353	0.22	5.8	1538	0.29	7.2	1856	0.45	9.4	2137	0.63	11.9	--	--	--		
700	1329	974	0.13	5.0	1070	0.16	5.6	1212	0.20	5.4	1386	0.26	6.3	1564	0.34	7.6	1875	0.51	9.7	2144	0.69	12.0	--	--	--		
800	1519	1075	0.18	6.1	1180	0.22	6.8	1306	0.27	6.9	1442	0.32	7.2	1597	0.40	8.0	1903	0.59	10.2	--	--	--	--	--	--		
900	1709	1178	0.24	7.2	1286	0.30	8.3	1414	0.36	8.9	1520	0.40	8.5	1650	0.48	8.9	1927	0.66	10.6	--	--	--	--	--	--		
1000	1899	1285	0.31	8.5	1388	0.38	10.0	1524	0.46	11.2	1621	0.52	--	1722	0.58	--	1965	0.75	--	--	--	--	--	--	--		
1100	2089	1393	0.40	10.0	1489	0.47	11.8	1635	0.59	12.7	1729	0.65	--	1814	0.71	--	--	--	--	--	--	--	--	--	--	--	
1200	2279	1503	0.51	11.7	1591	0.58	13.1	1744	0.73	14.3	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
1300	2469	1614	0.63	13.0	1695	0.71	14.3	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		

Page 4

Model 309		3/4 HP MAXIMUM 3/4" SHAFT										TIP SPEED = 2.65 x RPM WHEEL DIA. = 10.13"															
CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP				
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP
600	713	485	0.04	3.5	616	0.06	6.2	827	0.11	11.8	1003	0.17	--	1149	0.23	--	1388	0.37	--	1586	0.51	--	1759	0.66	--		
700	832	523	0.05	4.2	640	0.07	6.8	839	0.13	11.9	1011	0.19	17.3	1159	0.26	--	1402	0.41	--	1603	0.57	--	1778	0.73	--		
800	951	560	0.07	5.0	669	0.09	7.4	860	0.15	12.5	1018	0.21	17.3	1167	0.29	23	1414	0.45	--	1618	0.62	--	--	--	--		
900	1070	600	0.09	5.9	704	0.12	8.2	883	0.18	13.3	1036	0.25	18.3	1173	0.32	23	1423	0.49	35	1630	0.68	--	--	--	--		
1000	1189	641	0.11	6.9	743	0.15	9.0	908	0.21	14.0	1059	0.28	19.1	1189	0.36	24	1430	0.54	35	1640	0.74	45	--	--	--		
1100	1308	685	0.14	7.7	781	0.18	10.1	936	0.25	14.8	1081	0.33	19.5	1210	0.41	25	1436	0.58	35	--	--	--	--	--	--		
1200	1427	730	0.18	8.8	819	0.22	10.9	969	0.30	15.9	1105	0.38	20	1233	0.46	25	1452	0.65	35	--	--	--	--	--	--		
1300	1546	776	0.22	9.9	859	0.26	12.1	1006	0.35	16.7	1131	0.43	21	1256	0.52	26	1471	0.71	37	--	--	--	--	--	--		
1400	1665	823	0.27	11.2	901	0.31	13.7	1045	0.41	17.9	1163	0.50	22	1280	0.59	27	--	--	--	--	--	--	--	--	--		
1500	1783	870	0.32	12.5	944	0.37	14.7	1083	0.47	19.2	1198	0.57	23	1306	0.66	28	--	--	--	--	--	--	--	--	--		
1600	1902	918	0.38	14.2	988	0.44	15.9	1121	0.54	20	1236	0.65	25	1338	0.75	30	--	--	--	--	--	--	--	--	--		
1700	2021	966	0.45	15.8	1034	0.51	17.5	1160	0.62	21	1275	0.74	26	--	--	--	--	--	--	--	--	--	--	--	--		

Performance certified is for installation Type A: Free inlet, Free outlet.

Power rating bhp does not include transmission losses.

Performance ratings include the effects of the outlet hood and screen, but do not include the effects of back-draft dampers or other appurtenances (accessories).

SI CONVERSION FACTOR

CFM x .472 = L/s	SP x .249 = kPa
------------------	-----------------

The sound ratings shown are in loudness values in fan sones at 1.5m (5ft) in a hemispherical free field calculated per AMCA 301. Values shown are for Installation Type A: free inlet fan sone levels. Sone values not documented in unlisted areas.

300 SERIES PERFORMANCE DATA

Model 310		1-1/2 HP MAXIMUM 3/4" SHAFT										TIP SPEED = 2.99 x RPM WHEEL DIA. = 11.44"													
CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP		
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES
800	771	427	0.05	2.1	542	0.08	3.3	726	0.14	5.3	895	0.23	7.5	1033	0.32	9.8	1255	0.52	14.3	1436	0.72	18.5	1592	0.93	--
900	868	451	0.07	2.7	557	0.10	3.7	731	0.16	5.4	893	0.25	7.5	1033	0.35	9.8	1263	0.56	14.6	1447	0.78	18.5	1606	1.01	--
1000	964	476	0.08	3.1	575	0.12	4.1	745	0.19	5.6	887	0.27	7.5	1033	0.37	9.8	1266	0.60	14.6	1456	0.84	18.5	1618	1.09	--
1100	1060	503	0.10	3.8	596	0.14	4.6	761	0.22	5.9	895	0.30	7.5	1028	0.40	9.7	1265	0.63	14.6	1460	0.89	18.6	1626	1.16	22
1200	1157	530	0.12	4.3	620	0.16	5.0	776	0.25	6.3	908	0.33	7.8	1026	0.43	9.7	1265	0.68	14.6	1461	0.94	18.6	1632	1.23	22
1300	1253	559	0.15	5.0	645	0.19	5.5	792	0.28	6.7	926	0.38	8.2	1037	0.47	10.1	1262	0.71	14.6	1461	0.99	18.6	1634	1.29	22
1400	1350	589	0.18	5.6	670	0.23	6.0	810	0.32	7.0	940	0.42	8.6	1051	0.52	10.3	1255	0.75	14.3	1461	1.05	18.6	1633	1.35	22
1500	1446	619	0.21	6.3	696	0.26	6.7	831	0.37	7.5	955	0.47	9.1	1069	0.58	10.9	1260	0.80	14.6	1457	1.10	18.5	1634	1.42	22
1600	1543	649	0.25	6.8	723	0.31	7.2	853	0.41	8.0	971	0.53	9.4	1083	0.64	11.2	1271	0.87	14.7	1451	1.14	18.5	1632	1.49	22
1700	1639	680	0.29	7.5	751	0.35	7.9	877	0.47	8.8	989	0.58	10.0	1098	0.71	11.8	1285	0.95	15.3	1452	1.21	18.5	--	--	--
1800	1736	712	0.34	8.2	780	0.40	8.5	902	0.52	9.4	1009	0.65	10.6	1114	0.77	12.5	1303	1.03	15.7	1461	1.30	18.6	--	--	--
1900	1832	744	0.40	8.7	809	0.46	9.0	927	0.59	10.0	1031	0.72	11.4	1130	0.85	12.9	1318	1.12	16.4	1474	1.40	19.1	--	--	--
2000	1929	776	0.45	9.3	838	0.52	9.7	953	0.66	10.7	1055	0.79	12.0	1149	0.93	13.7	1333	1.22	16.6	1490	1.50	19.7	--	--	--

Page 5

Model 312		2 HP MAXIMUM 3/4" SHAFT										TIP SPEED = 3.27 x RPM WHEEL DIA. = 12.50"													
CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP		
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES
1200	823	396	0.09	2.7	492	0.13	3.3	653	0.23	5.3	798	0.38	7.5	917	0.53	9.4	1114	0.84	13.1	1276	1.18	--	1416	1.53	23
1400	960	427	0.12	3.3	519	0.18	4.0	666	0.28	5.6	800	0.42	7.8	922	0.59	9.6	1121	0.94	13.6	1287	1.31	17.3	1430	1.69	24
1600	1097	461	0.17	4.2	546	0.23	4.8	685	0.34	6.2	807	0.47	7.9	924	0.64	9.6	1126	1.03	13.8	1295	1.44	17.6	1440	1.86	25
1800	1234	499	0.22	5.1	575	0.29	5.6	709	0.42	6.9	823	0.54	8.5	929	0.70	9.9	1130	1.11	13.9	1299	1.56	18.0	--	--	--
2000	1371	540	0.29	6.1	607	0.36	6.5	736	0.52	7.8	843	0.65	9.1	943	0.80	10.2	1132	1.18	13.9	1304	1.67	18.1	--	--	--
2200	1508	583	0.37	7.3	641	0.44	7.5	763	0.61	8.7	867	0.77	9.8	962	0.92	10.9	1137	1.28	14.1	1306	1.77	18.2	--	--	--
2400	1646	626	0.47	8.3	678	0.53	8.6	791	0.72	9.7	895	0.91	10.8	984	1.07	11.9	1151	1.43	14.8	1306	1.86	18.2	--	--	--
2600	1783	670	0.58	9.5	717	0.65	9.6	821	0.84	10.6	922	1.06	11.7	1009	1.24	12.9	1169	1.59	15.6	--	--	--	--	--	--
2800	1920	713	0.71	10.5	758	0.79	11.0	854	0.98	11.7	950	1.21	12.6	1037	1.43	13.7	1189	1.81	16.7	--	--	--	--	--	--
3000	2057	757	0.86	11.9	800	0.95	12.1	888	1.14	12.4	978	1.38	13.5	1064	1.62	15.0	--	--	--	--	--	--	--	--	--
3200	2194	800	1.03	13.2	843	1.13	13.4	923	1.32	13.8	1008	1.57	14.9	1092	1.83	16.5	--	--	--	--	--	--	--	--	--
3400	2331	844	1.22	14.3	887	1.33	14.6	959	1.52	14.8	1041	1.78	16.1	--	--	--	--	--	--	--	--	--	--	--	--

Performance certified is for installation Type A: Free inlet, Free outlet.

Power rating bhp does not include transmission losses.

Performance ratings include the effects of the outlet hood and screen, but do not include the effects of back-draft dampers or other appurtenances (accessories).

SI CONVERSION FACTOR

CFM x .472 = L/s	SP x .249 = kPa
------------------	-----------------

The sound ratings shown are in loudness values in fan sones at 1.5m (5ft) in a hemispherical free field calculated per AMCA 301. Values shown are for Installation Type A: free inlet fan sone levels. Sone values not documented in unlisted areas.

300 SERIES PERFORMANCE DATA

Model 315

3 HP MAXIMUM
1" SHAFT

TIP SPEED = 3.99 x RPM
WHEEL DIA. = 15.25"

CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP		
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES
1500	730	330	0.09	--	414	0.14	2.6	560	0.26	5.1	673	0.41	7.7	767	0.56	9.4	923	0.90	--	1053	1.25	--	1165	1.62	--
1750	852	355	0.12	2.2	435	0.17	3.1	566	0.30	5.3	683	0.46	8.0	778	0.63	9.8	936	1.00	--	1067	1.39	--	1181	1.80	--
2000	974	383	0.16	2.8	456	0.22	3.6	577	0.36	5.6	690	0.52	8.2	788	0.71	10.1	947	1.11	--	1080	1.53	--	1196	1.97	--
2250	1095	411	0.21	3.5	480	0.28	4.3	596	0.42	6.2	697	0.59	8.4	796	0.78	10.3	958	1.21	15.2	1091	1.67	--	1208	2.15	--
2500	1217	440	0.27	4.3	505	0.34	5.0	617	0.50	6.9	711	0.67	8.7	802	0.87	10.6	967	1.32	15.6	1102	1.81	--	1219	2.32	--
2750	1339	470	0.34	5.1	532	0.42	5.7	639	0.59	7.6	729	0.77	9.3	812	0.97	11.0	975	1.43	15.9	1112	1.95	--	1230	2.49	--
3000	1461	501	0.42	6.0	561	0.52	6.5	661	0.70	8.4	751	0.89	9.9	829	1.09	11.7	981	1.56	16.2	1121	2.10	21	1240	2.67	--
3250	1582	532	0.52	6.9	590	0.62	7.5	685	0.82	9.1	772	1.02	10.7	848	1.24	12.6	988	1.70	16.5	1127	2.26	21	1250	2.85	--
3500	1704	564	0.63	7.9	619	0.74	8.4	711	0.95	9.8	794	1.17	11.6	870	1.40	13.5	1003	1.87	17.2	1133	2.43	22	--	--	--
3750	1826	597	0.76	9.0	649	0.88	9.5	738	1.11	10.8	817	1.33	12.5	891	1.57	14.4	1021	2.07	18.0	1141	2.62	22	--	--	--
4000	1948	630	0.91	10.3	679	1.03	10.5	766	1.28	11.9	841	1.52	13.5	913	1.77	15.4	1041	2.29	18.9	1155	2.84	23	--	--	--
4250	2069	664	1.07	11.6	710	1.21	11.6	794	1.47	13.0	867	1.72	14.6	936	1.98	16.4	1062	2.53	20	--	--	--	--	--	--
4500	2191	697	1.26	12.8	741	1.40	12.9	823	1.67	14.3	893	1.94	15.8	960	2.21	17.4	1084	2.79	21	--	--	--	--	--	--
4750	2313	731	1.46	14.2	773	1.61	14.3	852	1.90	15.4	921	2.19	17.0	984	2.47	18.5	--	--	--	--	--	--	--	--	--
5000	2435	766	1.69	15.7	805	1.84	15.7	881	2.15	16.7	949	2.45	18.2	1011	2.75	19.8	--	--	--	--	--	--	--	--	--

Model 318

5 HP MAXIMUM
1" SHAFT

TIP SPEED = 4.76 x RPM
WHEEL DIA. = 18.19"

CFM	OUTLET VELOCITY	1/8" SP			1/4" SP			1/2" SP			3/4" SP			1" SP			1-1/2" SP			2" SP			2-1/2" SP		
	FPM	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES	RPM	BHP	SONES
3000	1046	308	0.24	3.8	368	0.34	4.6	462	0.52	6.1	563	0.76	9.1	652	1.05	11.7	791	1.63	--	899	2.24	--	994	2.87	--
3250	1133	322	0.29	4.3	381	0.39	5.1	471	0.58	6.4	562	0.82	9.1	651	1.11	11.7	796	1.74	--	907	2.38	--	1002	3.05	--
3500	1220	337	0.34	4.7	394	0.46	5.6	482	0.66	6.8	562	0.89	9.1	650	1.18	11.8	798	1.85	16.1	914	2.53	--	1010	3.23	--
3750	1307	353	0.41	5.2	408	0.53	6.1	496	0.75	7.6	569	0.98	9.1	649	1.26	11.8	799	1.95	16.1	919	2.68	--	1017	3.41	--
4000	1395	369	0.48	5.9	422	0.61	6.6	508	0.85	8.1	578	1.08	9.6	648	1.35	11.8	798	2.04	16.1	921	2.83	21	1024	3.60	--
4250	1482	386	0.56	6.5	436	0.69	7.1	521	0.95	8.7	589	1.20	10.1	654	1.46	11.8	796	2.15	16.3	923	2.96	22	1028	3.79	--
4500	1569	403	0.65	7.1	450	0.78	7.8	534	1.07	9.4	602	1.33	10.8	663	1.60	12.1	796	2.28	16.3	922	3.09	21	1030	3.97	26
4750	1656	421	0.75	7.6	464	0.88	8.3	547	1.19	10.0	616	1.47	11.4	673	1.74	12.7	794	2.40	16.3	920	3.21	21	1031	4.14	26
5000	1743	438	0.86	8.3	479	1.00	8.9	561	1.33	10.6	628	1.62	12.2	685	1.90	13.2	796	2.54	16.3	919	3.38	22	1031	4.30	26
5250	1830	456	0.98	9.0	495	1.12	9.7	574	1.47	11.3	640	1.78	12.8	698	2.08	14.0	803	2.72	16.3	918	3.54	22	1029	4.44	26
5500	1918	474	1.11	9.7	512	1.26	10.2	588	1.62	12.1	653	1.96	13.5	712	2.27	14.5	811	2.92	17.1	917	3.70	22	1028	4.64	--
5750	2005	492	1.25	10.3	528	1.41	11.0	601	1.77	12.8	666	2.14	14.3	724	2.47	15.3	821	3.14	17.8	919	3.89	22	1027	4.85	--
6000	2092	511	1.41	11.0	545	1.57	12.0	615	1.94	13.5	680	2.34	15.0	736	2.69	15.9	832	3.37	18.4	925	4.13	22	--	--	--
6250	2179	529	1.58	12.0	562	1.75	12.8	629	2.12	14.0	693	2.54	15.6	749	2.92	16.8	845	3.63	19.1	933	4.39	22	--	--	--
6500	2266	547	1.76	13.0	579	1.94	13.7	644	2.31	15.0	707	2.76	16.5	762	3.16	17.7	859	3.90	20	942	4.67	23	--	--	--
6750	2354	565	1.96	13.8	597	2.14	14.5	658	2.52	15.6	720	2.98	16.9	775	3.41	18.5	872	4.19	21	953	4.97	23	--	--	--
7000	2441	583	2.16	14.4	615	2.36	15.3	674	2.75	16.4	734	3.22	17.9	789	3.68	19.4	884	4.49	22	--	--	--	--	--	--

Performance certified is for installation Type A: Free inlet, Free outlet.

Power rating bhp does not include transmission losses.

Performance ratings include the effects of the outlet hood and screen, but do not include the effects of back-draft dampers or other appurtenances (accessories).

SI CONVERSION FACTOR


CFM x .472 = L/s SP x .249 = kPa

The sound ratings shown are in loudness values in fan sones at 1.5m (5ft) in a hemispherical free field calculated per AMCA 301. Values shown are for installation Type A: free inlet fan sone levels. Some values not documented in unlisted areas.

300 SERIES BLOWERS

SUBMITTAL DRAWING

SD-13-1

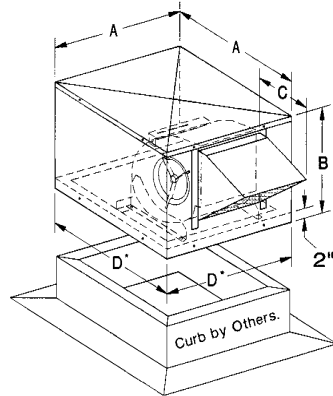

DIMENSIONS (inches)

D* is an inside dimension.
Curb must be smaller
to allow for flashing.



Delhi Industries Inc. certifies that the 300 Series Roof Exhauster shown herein are licenced to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme.

MODEL	A	B	C	D	SHAFT DIA.	UNIT WT. (LBS.)
307	20-3/8	16-5/8	9	20	3/4"	45
309	24-3/8	19-3/8	10-5/8	24	3/4"	63
310	28-3/8	21-3/8	11-3/8	28	3/4"	88
312	32-3/8	24-5/8	13-1/8	32	3/4"	113
315	36-3/8	28-3/8	14-7/8	36	1"	156
318	40-3/8	33-3/4	17-3/8	40	1"	224

NOTE: WT. SHOWN IS LESS MOTOR AND DRIVE

BLOWER DATA							MOTOR DATA					PULLEYS		BELT
FAN #	QTY.	MODEL	CFM	SP	HP	RPM	HP	FRAME	VOLT	Ph	RPM	BLOWER	MOTOR	

PROJECT NAME:	ENGINEER:	DATE SUBMITTED
CONTRACTOR:	SUPPLIER:	DELHI INDUSTRIES INC.

Other **DELHI** Catalogues




Cat. #SS-31
Forward Curved
Duct Blowers



Cat. #SS-38
Heating & Cooling
Coils




Cat. #SS-52
Direct Expansion
Coils



Cat. #SS-30
10" to 36"
Utility Blowers




Cat. #SS-32
Filtered Fresh Air
Supply Units




Cat. #SS-50
Backward Inclined
Inline Blowers



Cat. #SS-44
DWDI - BI
Blowers



Cat. #SS-49
7" - 36"
FC Blowers




Cat. #SS-48
Plenum
Fans



Cat. #SS-45
Direct Drive
Utility Blowers




Cat. #SS-34
Replacement
Parts




Cat. #SS-53
FC Direct Drive
Blower with Motor



Cat. #SS-51
Aluminum
Exhausters



Cat. #SS-54
Upblast
Exhausters



Cat. #SS-55
Horizontal
Restaurant
Exhauster

DELHI Industries Inc.
523 James St.
Delhi, Ontario
Canada N4B 2Z3
tel. (519) 582-2440
fax. (519) 582-0581
www.delhi-industries.com
e-mail: sales@delhi-industries.com

REPRESENTED BY:

WARRANTY

Delhi Air Moving Products are guaranteed for a period of one year against manufacturing defects in material and workmanship when operating under normal conditions. Liability is limited to the replacement of defective parts. Labour and transportation costs are not included.